



## TOWN OF GRAFTON

### EXAMPLE

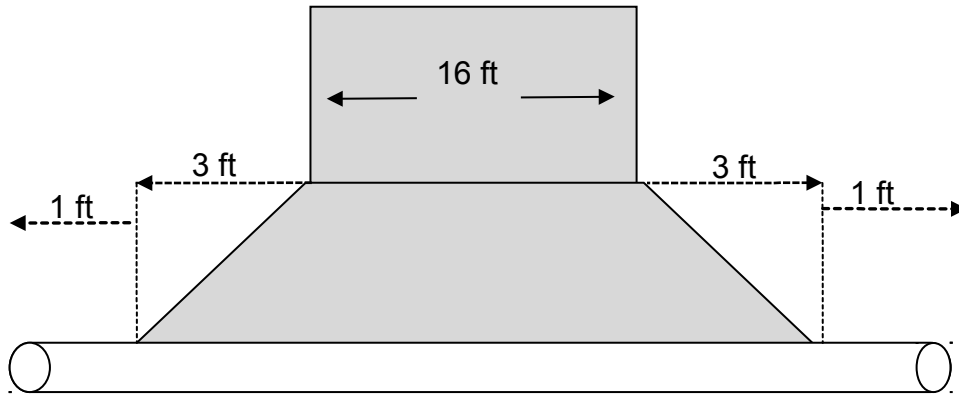

- Culvert length is dictated by driveway width.
- The Town of Grafton requires each culvert to extend one foot beyond the edge of the driveway taper, which is typically three feet. (min 20 feet) (max 30 feet)
- Existing ditch grades must be maintained throughout and after construction.
- Both culverts shall have a minimum of 6" of aggregate base.

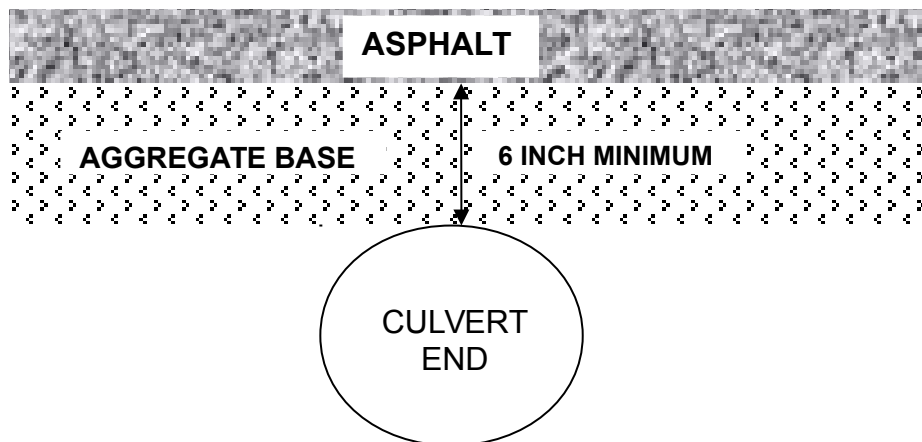

CULVERT LENGTH IS DICTATED BY DRIVEWAY WIDTH.

THE TOWN OF GRAFTON REQUIRES EACH CULVERT TO EXTEND ONE FOOT BEYOND THE EDGE OF THE DRIVEWAY TAPER, WHICH IS TYPICALLY THREE FEET. (MIN 30 FEET) EXISTING DITCH GRADES MUST BE MAINTAINED THROUGHOUT AND AFTER CONSTRUCTION.

BOTH CULVERTS SHALL HAVE A MINIMUM OF 6" OF AGGREGATE BASE.